

City of Forest Lake, Minnesota

\FRLK\0N1131361\CAD\C3D\131361C101.dwg 7/2/2025 12:19:43 PM



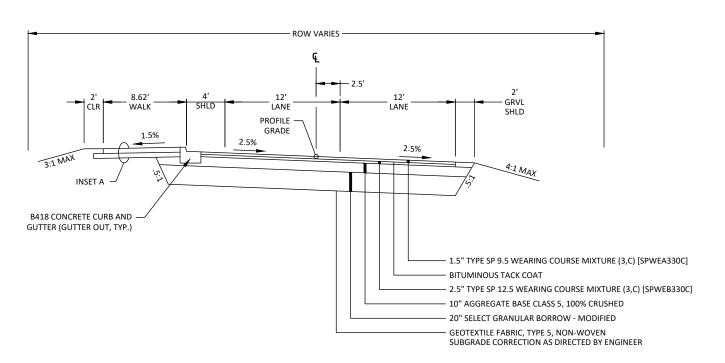

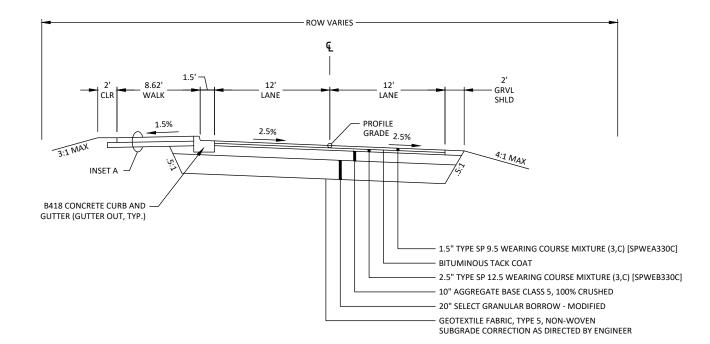

HORNSBY STREET NE / EUREKA AVENUE N PROPOSED TYPICAL SECTION #2 STATION 7+00 TO 17+50

HORNSBY STREET NE PROPOSED TYPICAL SECTION #1 STATION 1+26 TO 6+00

- ROW VARIES




CLEAR ZONE GRVL SHLD PROFILE 1.5% 2.5% GRADE 2.5% 3:1 MAX 4:1 MAX INSET A B418 CONCRETE CURB AND GUTTER (GUTTER OUT, TYP.) 1.5" TYPE SP 9.5 WEARING COURSE MIXTURE (3,C) [SPWEA330C] BITUMINOUS TACK COAT 2.5" TYPE SP 12.5 WEARING COURSE MIXTURE (3,C) [SPWEB330C] 10" AGGREGATE BASE CLASS 5, 100% CRUSHED 20" SELECT GRANULAR BORROW - MODIFIED

GEOTEXTILE FABRIC, TYPE 5, NON-WOVEN

SUBGRADE CORRECTION AS DIRECTED BY ENGINEER

EUREKA AVENUE N PROPOSED TYPICAL SECTION #3 STATION 18+70 TO 62+00 STATION 66+70 TO 70+00

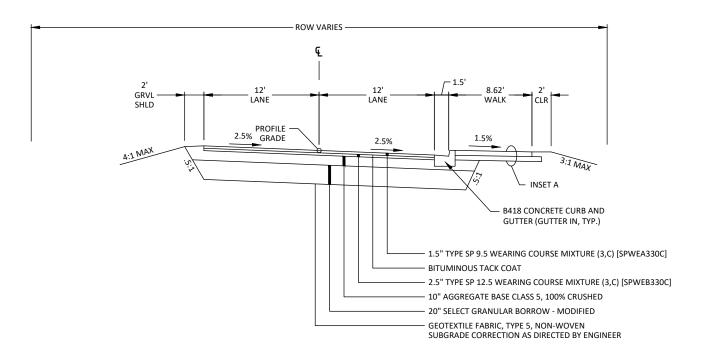

EUREKA AVENUE N PROPOSED TYPICAL SECTION #4 STATION 63+20 TO 65+50